

# K-LOK SINGLE POLE CONNECTOR

400A, 600V AC/DC

## RECEPTACLE FEMALE



**Item Number:** Refer to the following chart

Example: Brown Female Receptacle = KL-400SSFBN

KL-400SSF **BK** **R** **B** **W** **G** **BN** **GY** **Y** **O**

**Description:** 400A K-LOK panel female, double set screw



### Listings

UL and cUL Listed file number E332947

Environment Rating: UL enclosure types 3R

Flame Class: HB / UL94

### Material Information

Base Compound: Santoprene TPV

Temperature Rating: up to 105°C

Contact Material: Brass

### Electrical Information

Amperage Rating: 400A Maximum

Voltage Rating: 600V AC/DC Maximum


### Mechanical Information

Terminal Accommodation: #6 to 4/0 AWG

Connection type:

2 x 7/32" socket head set screw

Mounting Hole: 4 x Ø7/32"

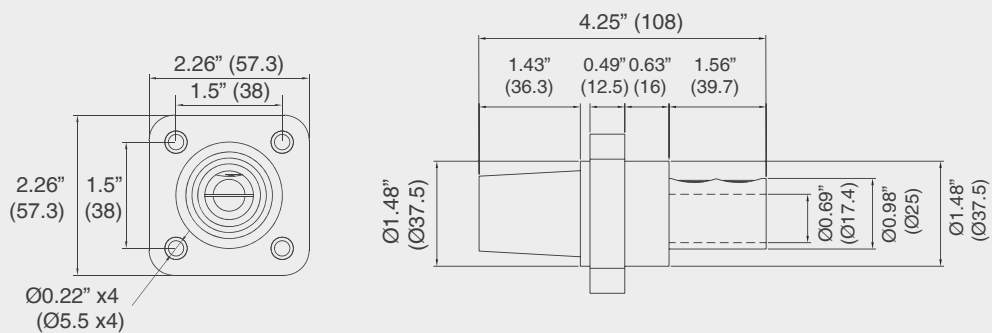

unit: inches (mm)

- Specifications subject to change without notice.
- [www.stage.com.tw](http://www.stage.com.tw)