

## POWERFIT SINGLE POLE CONNECTOR

800A

### LINE SOURCE

# KUPO®

#### Features

- \* Innovative key-release pin allows for fast and convenient disconnection
- \* Copper contact with silver plating ensures excellent conductivity
- \* Ergonomic rubber grip enhances handling comfort and safety
- \* Durable thermoplastic body offers superior impact resistance and electrical insulation
- \* M40\*1.5 cable gland with rubber bushing for secure IP67-rated sealing



**Item Number:** PFLS-3BL-C300-400-M40/M50

Phase: L3

Color: Blue

Type: Crimp (for 400mmsq cable)

Cable Gland (Standard) : M40/CG-M4015-32

Cable Gland (Option): M40/CG-M4015-X(39)



Type Approved  
Safety  
Regular Production  
Surveillance

www.tuv.com  
ID 1111304988

#### Material Information

Connector Body: Non-conductive high impact-resistant thermoplastic

Contact Material: Copper (silver-plated)

Cable Gland: Nylon

Bushing : Rubber and Silicone

#### Electrical Information

Amperage Rating: 800A Maximum

Voltage Rating: 1000V AC/DC Maximum

Test Voltage: 4500V AC

Short Circuit Rating: Up to 35.5kA

Insulation Resistance: > 5000M Ohms at 500V AC

Contact Resistance: 0.1m Ohms

#### Mechanical Information

Contact Type: Crimp

Connection Type: Push-and-twist with key release mechanism

Cable Gland Size: M40 x 1.5 with sealing bushing

Inner Diameter(Standard) : 14-22 mm and 23-33mm

Inner Diameter(Option) : 31-39 mm

Mating Cycle: 500

#### Environmental Information

Ingress Protection: IP67 rating while mated


Flammability: UL94-V0 (body material rating)

Working Temperature: -25 to 125 °C

Certifications: TÜV, CE, RoHS and REACH compliant



#### Dimensions

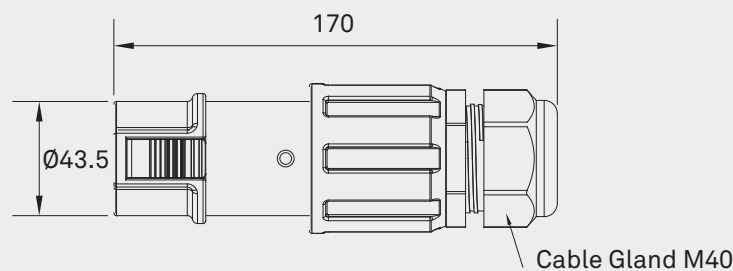

unit : mm

• Specifications subject to change without notice.

2026 V1