

## POWERFIT SINGLE POLE CONNECTOR

800A

### PANEL DRAIN

# KUPO®

#### Features

- \* Brass contact with silver plating ensures excellent conductivity
- \* Ergonomic rubber grip enhances handling comfort and safety
- \* Durable thermoplastic body offers superior impact resistance and electrical insulation
- \* O-ring provides an excellent protection against water and dust ingress after mating



**Item Number:** PFPD-NBL-T8

Phase: Neutral

Color: Blue

Type: Threaded post

#### Material Information

Connector Body: Non-conductive high impact-resistant thermoplastic

Contact Material: Copper (silver-plated)

O-Ring: Silicone

Nut & Washer: Brass & Phosphor Bronze



Type Approved  
Safety  
Regular Production  
Surveillance

www.tuv.com  
ID 1111304988

#### Electrical Information

Amperage Rating: 800A Maximum

Voltage Rating: 1000V AC/DC Maximum

Test Voltage: 4500V AC

Rated Short-Time Withstand Current ( $I_{cw}$ ): 16 kA / 1 s (RMS)

Rated Short-Circuit Peak Current ( $I_{pk}$ ): 35.5 kA (Peak)

Insulation Resistance: > 5000M Ohms at 500V AC

Contact Resistance: 0.1m Ohms



#### Mechanical Information

Contact Type: M12 threaded post

Nut Torque: Maximum 12-14 N/meter

Connection Type: Push-and-twist

Mating Cycle: 500

#### Environmental Information


Ingress Protection: IP67 rating while mated

Flammability: UL94-V0 (body material rating)

Working Temperature: -25 to 125 °C

Certifications: TÜV, CE, RoHS and REACH compliant

#### Dimensions

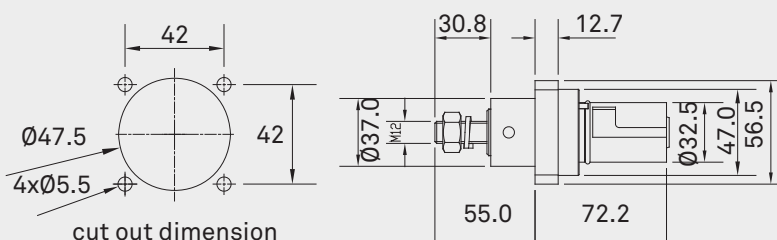

unit : mm

• Specifications subject to change without notice.

2026 V1