POWERFIT SINGLE POLE CONNECTOR

800A

PANEL DRAIN

Features

* Brass contact with silver plating ensures excellent conductivity
* Ergonomic rubber grip enhances handling comfort and safety
* Durable thermoplastic body offers superior impact resistance and electrical insulation
* O-ring provides an excellent protection against water and dust ingress after mating

Item Number: PFPD-NGY-T8
Phase: Neutral
Color: Gray
Type: Threaded post

Type Approved
Safety
Regular Production
Surveillance
TÜVRheinland
CERTIFIED
www.tuv.com
ID 1111304988

Material Information

Connector Body: Non-conductive high impact-resistant thermoplastic
Contact Material: Copper (silver-plated)
O-Ring: Silicone
Nut & Washer: Brass & Phosphor Bronze



Electrical Information

Amperage Rating: 800A Maximum
Voltage Rating: 1000V AC/DC Maximum
Test Voltage: 4500V AC
Rated Short-Time Withstand Current (Icw): 16 kA /1 s (RMS)
Rated Short-Circuit Peak Current (Ipk): 35.5 kA (Peak)
Insulation Resistance: > 5000M Ohms at 500V AC
Contact Resistance: 0.1m Ohms


Mechanical Information

Contact Type: M12 threaded post
Nut Torque: Maximum 12-14 N/meter
Connection Type: Push-and-twist
Mating Cycle: 500


Environmental Information


Ingress Protection: IP67 rating while mated
Flammability: UL94-V0 (body material rating)
Working Temperature: -25 to 125 °C
Certifications: TÜV, CB, UKCA, CE, RoHS and REACH compliant


Dimensions

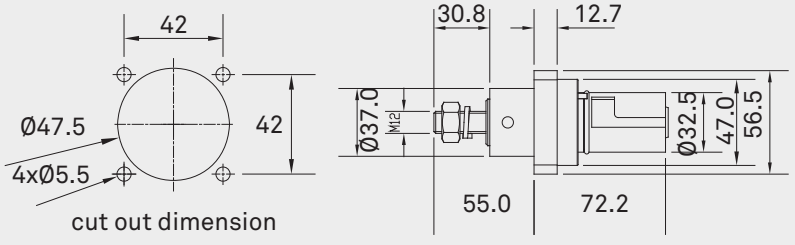



unit : mm

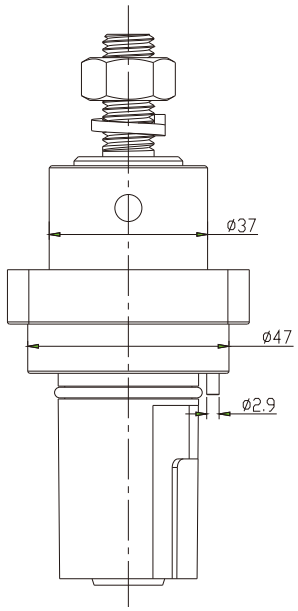

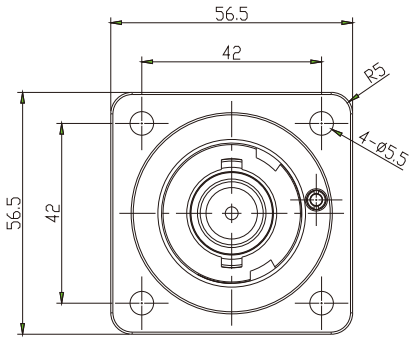

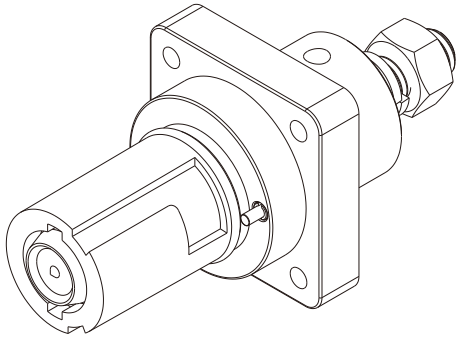

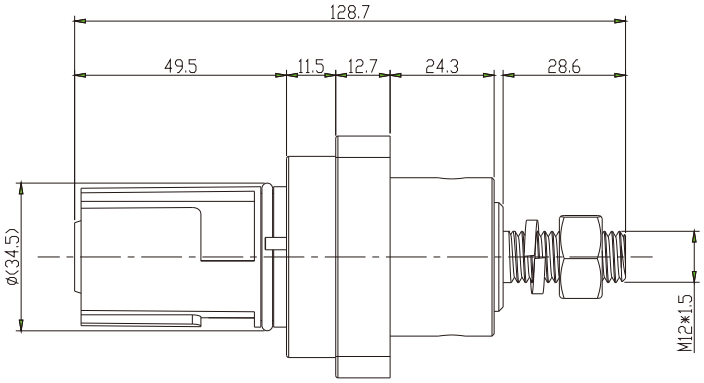

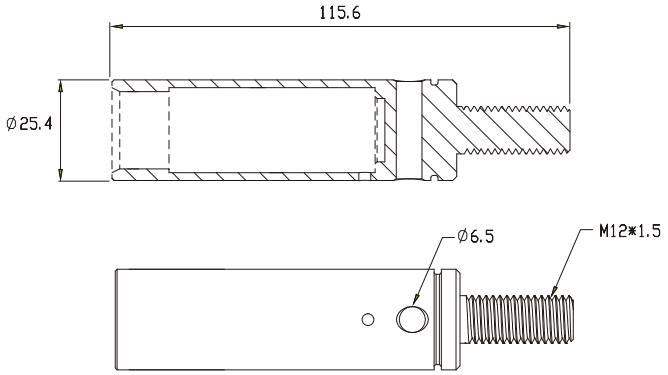

TÜVRheinland CERTIFIED

CB UK CA CE

RoHS Compliant

REACH Compliant

KUPO®

© 2026 KUPO All rights reserved.
KUPO Shanghai Co., Ltd.
Address: Building 66, No. 2050 Dingsheng Rd.,
Songjiang District, Shanghai, China
Websites: kupopower.com / kupopower.com.cn

This document is provided for reference purposes only. It is not intended for use as a construction, installation, or fabrication drawing. KUPO shall not be liable for any loss or damage arising from the use of this document for such purposes.

These files may not be reproduced, distributed, or made available to third parties without prior written permission from KUPO.

KUPO Powerfit connectors are designed to be compatible and intermateable with other ITT Powerlock style connectors such as P3 Powersafe and Ten47 Powerline. There is no current unified standard for this connector.

UNLESS OTHERWISE SPECIFIED

DIMENSIONS ARE IN MILLIMETERS

DO NOT SCALE

ORG. SCALE	CREATE DATE.
NTS	10/Aug/2026

MATERIAL

HOUSING: Non-conductive, high-impact-resistant thermoplastic, UL 94 V-0
CONTACT: Silver-plated copper

TITLE

800A POWERFIT PANEL DRAIN CONNECTOR

DWG. NO.	ISSUE NO.
KPFPD800	1